


# Black & White Printing

\*Throw Black & White paper in the Paper Recycling Bin for silver recovery.  
Throw trash in wastebasket.

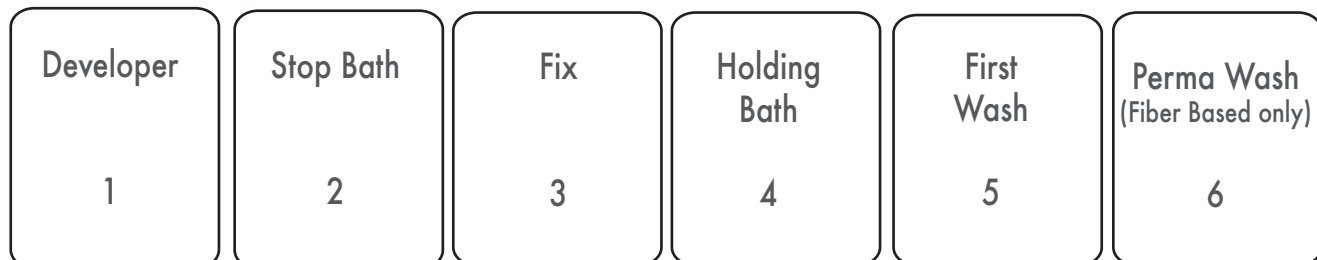

## RC Paper

- 1] Developer :: 1 minute - continuous agitation
- 2] Stop Bath :: 10 seconds
- 3] Fix :: 1 minute - continuous agitation
- 4] Holding Bath :: Keep all prints in holding bath until ready to do final wash
- 5] First Wash :: 5 minutes

RC Dryer :: Make sure the print is larger than 5x7

## Fiber Based

- 1] Developer :: 1½ - 2 minutes - continuous agitation
- 2] Stop Bath :: 30 seconds
- 3] Fix :: 1 minute - continuous agitation
- 4] Holding Bath :: Keep all prints in holding bath until ready to do final wash
- 5] Perma Wash :: 3 minutes - continuous agitation
- 6] First Wash or Rocker Wash :: 5 minutes

Squeegee off excess water and place on rack to dry

*You Provide* :: Photo Paper, Towel, Negative Cleaner, etc.  
*MCAD Provides* :: Negative Carrier, Enlarger Lens, Easel, Tray, Filters, Grain Focuser, and Glass

